

Axsun™ NIR Analyzer Diffuse Reflectance Probe for Application Development

DATA SHEET



A Comprehensive Sample-Interface Tool for Use with the Axsun NIR Analyzer XL

The Diffuse Reflectance Probe – manufactured for Axsun by a world leader in process-spectroscopy solutions – Sentronic, features a laboratory sample interface that is optimized for NIR spectroscopic solid-phase analysis. Diffuse reflectance is an excellent sampling tool for NIR analysis of powdered or crystalline materials and intractable solid samples. It has the added benefit of being well-suited to automation.

Methods can be developed with the accessory and then easily transferred to an automated process flow.

The Diffuse Reflectance Probe is designed to work with Axsun's IntegraSpec™-powered NIR Analyzer XL. Put the probe and the analyzer together – and you have all you need to run a wide range of solid-phase samples to develop applications quickly and easily. The combination delivers unparalleled system performance, enabling the applications developer to solve the toughest in-line process problems.

Rugged, versatile, and designed for the exacting demands and hostile environments of industrial-process applications, Axsun's leading-edge Integra-Spec micro-spectrometer platform makes real-time, process measurements feasible and affordable. Combined with Axsun's proprietary WARM™ Wavelength/Amplitude Referencing Module, methods developed on the NIR Analyzer can be rapidly transferred to IntegraSpec process spectrometers distributed throughout the process line.

Product Description

The Diffuse Reflectance Probe is a sampling tool for use with the Axsun NIR Analyzer XL to develop process-monitoring applications on the IntegraSpec XL and XLP platforms. It is designed for spectroscopic analysis of solids including flakes, powders, and crystals, using diffuse reflectance in a laboratory environment.

Rapid Transition to Process Solution

A process-grade Diffuse Reflectance Probe is readily available to rapidly transfer application development from laboratory to process. The identical optical configuration is available with process-grade temperature and pressure ratings, materials, seals, and application-specific mechanical dimensions and fittings. Process-grade versions are also available to comply with FDA-compliant contact parts and application-specific environmental compliance.



APPLICATION EXAMPLES

- Raw-Material Inspection
- Point-of-Use QA/QC
- Blending and Mixing Monitoring
- Drying Monitoring
- Automated QC/QA of Continuous Processes



NIR Analyzer XL for application development



AXSUN
TECHNOLOGIES

www.axsun.com

06-02-072B

1 Fortune Drive, Billerica, Massachusetts 01821
Tel: 978.262.0049, FAX: 978.262.0035
E-mail: info@axsun.com

© 2005 Axsun Technologies, Inc.

Axsun™ NIR Analyzer Diffuse Reflectance Probe for Application Development

PERFORMANCE SPECIFICATIONS

Part No. AXS81762


General Specifications

Optimum Spectral Range	1320 to 1800 nm
Diameter, Illumination Area	25.4 mm (1 inch diameter)
Sampling Configuration	Direct window-to-sample
Probe Material	316 stainless steel; process grade available
Probe Diameter	25 mm
Probe Length	100 mm
Total Length	2 m including fiber delivery
Fiber Optic Cable	3 mm outer diameter stainless steel cabled
Sample Window	Scratch-resistant sapphire
Window Seal	Epoxy, not for use with solvents; process grade available
Fittings	316 stainless steel; process grade available
Optical Interface	Excitation: polarization-maintaining fiber, FC/APC Collection: multimode fiber, SMA905
Temperature / Pressure	125 °C / 6 bar; process grade available
Environmental Compliance	None; process grade available
Compatibility	Axsun NIR Analyzer XL

(Specifications are subject to change without notice)



PRODUCTS FOR APPLICATION DEVELOPMENT

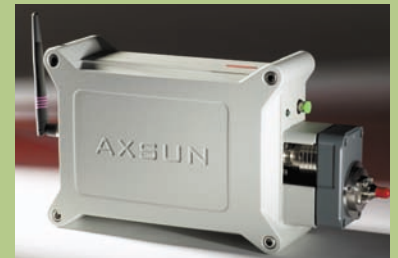

NIR Analyzer XL for application development



Liquid-Transmission Probe



Diffuse Reflectance Accessory

For more information

Contact Axsun at:

1 Fortune Drive

Billerica, MA 01821

Attn: Sales Department

978.262.0049

Visit us on the Web: www.axsun.com

© 2005 Axsun Technologies, Inc.